
HOLLSTEIN Pad and Midrise Lifts

6,000 LB. LOW-RISE PAD LIFT Easy frame lifting on padded runways. Great for wheel and brake work, tire and wheel changing as well as new car preparation.

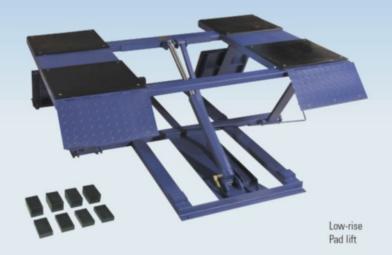

Features:

- 6,000 lb. lifting capacity
- · Automatic safety locks
- Low drive-over height for approach of low vehicles
- High speed motor lifts from 3"-26" in only 35 seconds
- 2 sets of rubber riser blocks

6,000 LB. MID-RISE LIFT Mid-rise models lift cars, vans and light-duty trucks. They are ideal for tire, wheel and brake related repairs, collision repair work and new car preparation.



Specifications	Pad Lift	Midrise Lift
Lifting capacity	6,000 lbs.	6,000 lbs.
Overall width	73"	39 %"- 57"
Overall length	86"	96 ½"
Maximum height	26"- 30"	48 ½"- 54"
Low pad height	NA	7"
Lifting speed	35 sec.	40 sec.
Motor	1hp/110 vac	1hp/110 vac
Width between runways	35"	NA
Runway width	19"	NA
Collapsed height	5″	4 3/4"
Shipping weight	1,012 lbs.	950 lbs.

Features:

- 6,000 lb. lifting capacity
- Portable trolley supports pump and moves lift
- Twin hydraulic cylinders and scissors lift design for maximum strength and stability
- Easily adjustable sliding radius arms
- Automatic two-position safety locks
- Swivel pads come standard. Optional drop-in height adapters are also available